




POWER



P 1504

P1504 CLASS D 4/3/2 CHANNEL AMPLIFIER

- Powerful 4-channel amp
- Bridgeable for high-power 2-way setups
- Full-range or 2-way active systems
- Flexible speaker setups

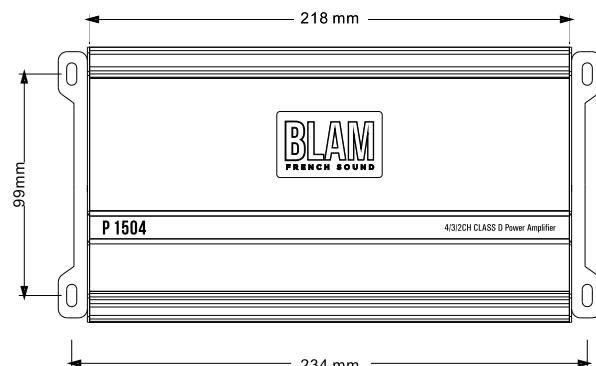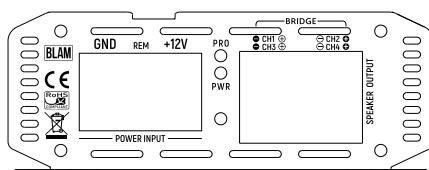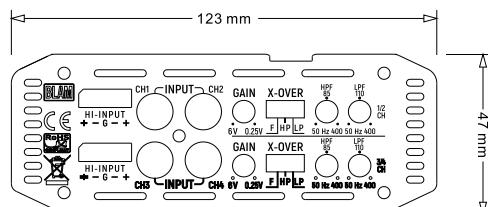

TECHNICAL FEATURE

High level input with automatic 4-8V start-up

Low level RCA inputs: 0.25-6V

Power (4 Ohms): 4 x 150 Watts RMS

Power (2 Ohms): 4 x 250 Watts RMS

Bridge power (4 Ohms): 2 x 500 Watts RMS

Subsonic filter 10-50 Hz

Low-pass filter: 50 Hz-400 Hz

High-pass filter: 50 Hz -400 Hz

Adjustable Bass Boost 0-12 dB (45Hz)

Signal-to-noise ratio >90 dB

TDH < 0.15%

Frequency response: 10 Hz -50 kHz

Protections: short circuit / low impedance / polarity reversal / thermal protection

Dimensions (LxLxH) : 234 x 123 x 47 mm

Supplied accessories :

User manual

High level input connector

Fixing screw with additional fuse

contact@blam-audio.fr

www.facebook.com/blamaudio

www.blam-audio.com