

Prima

# AP 1P



Tweeter component  
**150 W**




TECHNICAL SPECIFICATIONS		
Component		Tweeter
Size	mm (in.)	29 (1.14)
Power Handling	W peak	150 Hi-pass filtered @2,5KHz-12dB/oct.
Impedance	$\Omega$	8
Frequency Response	Hz	1,2 ÷ 25k
Crossover name		APCX P 2T
Crossover Type		High Pass 12 dB/oct.
Crossover point		4 kHz
Crossover adjustment		Tweeter Level: 0 / +3 dB
Magnet size D x h	mm (in.)	22 x 2,5 (0.87 x 0.1)
Tweeter Weight	kg (lb.)	0,067 (0.15)
Crossover weight	kg (lb.)	0,065 (0.14)
Tweeter Voice Coil $\emptyset$	mm (in.)	25 (1)

ELECTRO-ACOUSTIC PARAMETERS		
D	mm	29
Re	$\Omega$	5,75
Fs	Hz	1600
Le	mH	0,04
Mms	g	0,23
Cms	mm/N	0,05
BL	T·m	2,7
Qts		1,21
Qes		1,74
Qms		4
Spl	dB	92

- 1 AIF technology (Any Install Faceplate) for total application versatility and a significant reduction in installation time
- 2 Three mounting accessories supplied to provide a solution for any type of installation
- 3 Magnetic group with double Neodymium tablet for an excellent high frequency extension
- 4 1" CCAW voice coil for superior dynamic response
- 5 Dome profile optimized with FEM simulations for a wide off-axis dispersion

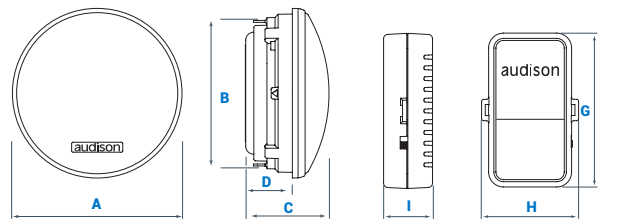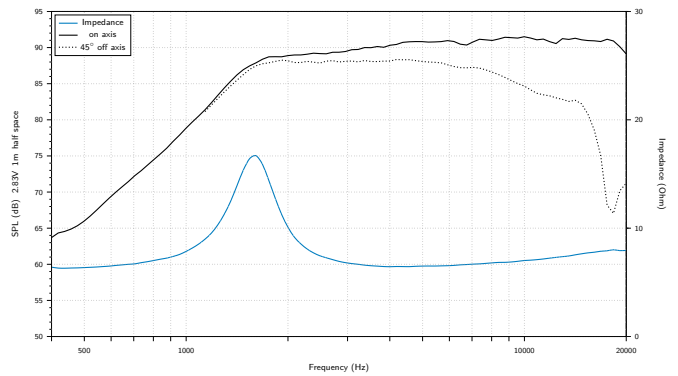

A	B	C	D	G	H	I
43,7 mm	40,8 mm	21,8 mm	12,2 mm	72 mm	45,5 mm	23 mm
1.72 in.	1.61 in.	0.86 in.	0.48 in.	2.83 in.	1.79 in.	0.91 in.



**Elettromedia**  
62018 Potenza Picena (MC) Italy  
T +39 0733 870 870 - F +39 0733 870 880  
elettromedia.com

