

# Signature

# BLAM

FRENCH SOUND

Driven by passion.

## TS 20 MG 35 HR

### HIGH RESOLUTION TWEETER


- 20 mm (3/4") pur magnesium dome tweeter
- Super powerful neodymium magnet N48
- High precision Machined Aluminium front plate
- Sound transparent protective grill




### TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	15 W	
Impedance	4 Ω	
Freq. Response	1.5 KHz - 45 KHz	
Sensitivity (2.83 V/1m)	88 dB	
Magnet	Neodymium	
Magnet size Ø x h	19.5 x 3 mm	0.748" x 0.118"
Total driver displacement	-	-
Weight of one component	0.044 kg	0,097 lb
Voice coil Ø	20 mm	0.787"
Voice coil height	4.2 mm	1.157"
Dome	Soft	

Unit : mm

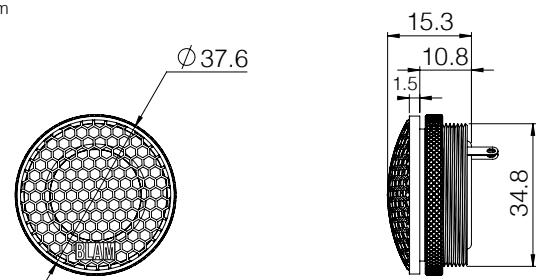

### FREQUENCY RESPONSE / IMPEDANCE

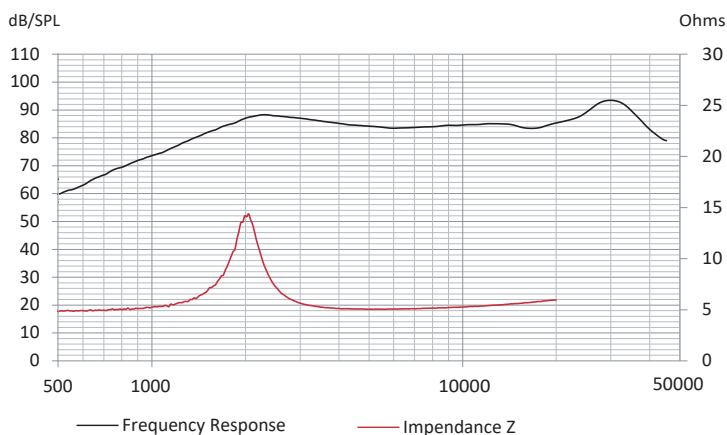

### THIELE-SMALL PARAMETERS

Effective Ø (d)	24 mm
Sd	4.52 cm <sup>2</sup>
Xmax	-
Re	3.98 Ω
Fs	2 kHz
Le	-
L2	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	84.8 dB

contact@blam-audio.fr  
www.facebook.com/blamaudio

blam-audio.com