

Signature Multix



Driven by passion.

MS 2 MULTIX

HIGH FIDELITY FULL-RANGE DRIVER


- 50 mm (2") high fidelity full-range
- Max. power 50 W / Nominal Power 25 W
- Frequency response 250 Hz - 22 kHz
- Impedance 4 Ω




TECHNICAL SPECIFICATIONS

Component	Full range	
Max power	50 W	
Nominal power	25 W	
Impedance	4 Ω	
Freq. Response	250 Hz - 22 kHz	
Sensitivity (2,83V/1m)	87 dB	
Magnet	Neodymium	
Magnet size Ø x h	8 x (9 x 10 mm)	8 x (0.354" x 0.394")
Total driver displacement	0.3 l	0.011 cf
Weight of one component	0.254 kg	0.560 lb
Voice coil Ø	20 mm	0.803"
Voice coil height	7.7 mm	0.303"
Cone	Black kevlar fiber	

Unit in mm

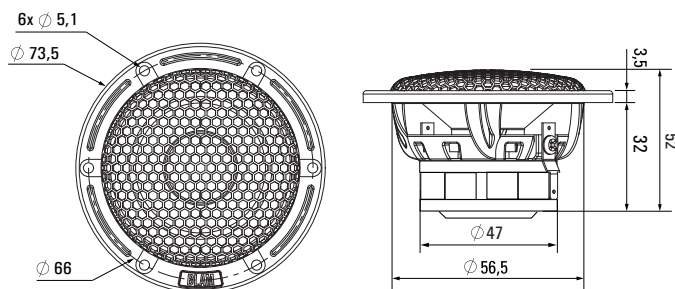

FREQUENCY RESPONSE / IMPEDANCE

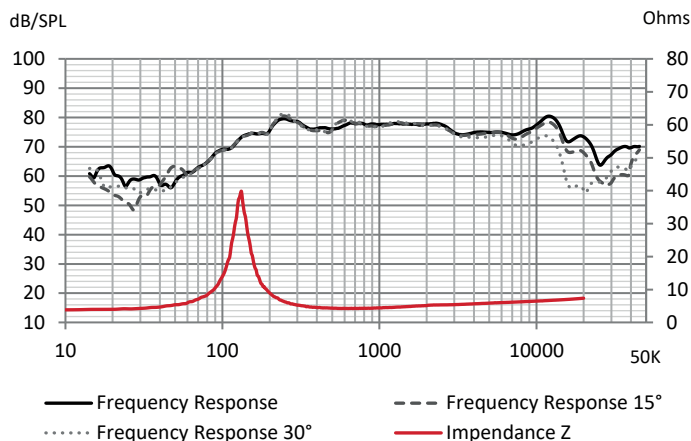

THIELE-SMALL PARAMETERS

effective Ø (d)	46 mm
Sd	16.62 cm ²
Xmax	2 mm
Re	3.8 Ω
Fs	130 Hz
Le	26.70 µH @ 1 kHz
L2	151.69 µH @ 10 kHz
Vas	0.40 L
Mms	1.44 g
Cms	1.032 m/N
BL	2.87 Tm
Qts	0.50
Qes	0.55
Qms	5.06
Sensitivity (dB/W/m)	84 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

www.blam-audio.com